


Size	CLASS150		JIS 10K		PN10		PN16		A	B	C	ΦD	H	L	WT (kg)	
DN	NPS	D1	N-Φd1	D1	N-Φd1	D1	N-Φd1	D1	N-Φd1							
32	1½"	88.9	4-Φ15.9	100	4-Φ19	100	4-Φ19	100	4-Φ19	110	64	213	34.6	242.35	33	1.2
40	1½"	98.5	4-Φ15.9	105	4-Φ19	110	4-Φ19	110	4-Φ19	120	70	213	43	258.35	33	1.8
50	2"	120.6	4-Φ19.1	120	4-Φ19	125	4-Φ19	125	4-Φ19	140	80	213	52.9	288.35	42	3.1
65	2½"	139.7	4-Φ19.1	140	4-Φ19	145	4-Φ19	145	4-Φ19	150	89	213	64.5	307.35	44.7	3.55
80	3"	152.4	8-Φ19.1	150	8-Φ19	160	8-Φ19	160	8-Φ19	158	95	213	78.8	321.35	46	3.95
100	4"	190.5	8-Φ19.1	175	8-Φ19	180	8-Φ19	180	8-Φ19	176	114	277	104	363.64	52	5.1
125	5"	215.9	4-Φ22.4	210	4-Φ23	210	4-Φ23	210	4-Φ19	190	127	277	123.3	390.64	54.4	7
150	6"	241.3	4-Φ22.4	240	4-Φ23	240	4-Φ23	240	4-Φ23	211	139	277	155.1	423.64	55.8	8.5

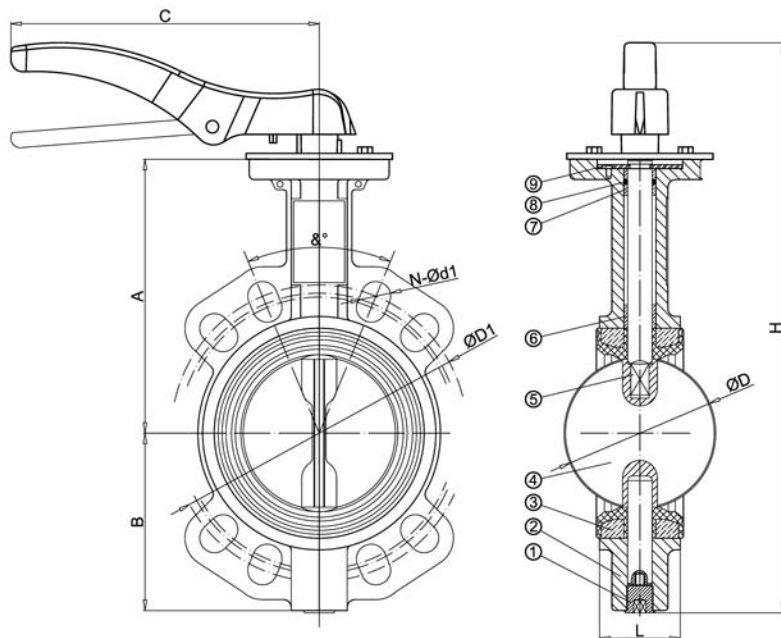

APPLICABLE STANDARDS & TECHNICAL NOTES:

DESIGN CODM		API609		
INSPECTION&TEST		API598		
END STANDARD		ANSI 150#/JIS10K		
FACE TO FACE		API609		
9	THRUST INSERT	CARBON STEEL	1	
8	O-RING	NBR	2	
7	SHORT BUSHING	PTFE	1	
6	LONG BUSHING	PTFE	1	
5	STEM	SS410	2	
4	DISC	WCB/DI+NYLON/CF8/CF8M	1	
3	SEAT	NBR/EPDM/PTFE/VITON	1	
2	BODY	DI/WCB/CF8/CF8M	1	
1	TOP SILK	CARBON STEEL	1	
NO.	PARTS NAME	MATERIAL	QTY	NOTE

TEST PRESSURE

	SHELL	SEAL
HYDROSTATIC	24/15 kg/cm ²	17.6/11 kg/cm ²
AIR	/	/

TITLE:WAFER BUTTERFLY VALVE
DN32-DN200

					DWG NO:FT0114000001-1.1
1	2006.2.1	ZhuHui	Brian	Sky Tang	
REV	Date	DRN	CHK	APRV	SCALE
					UNIT mm

