


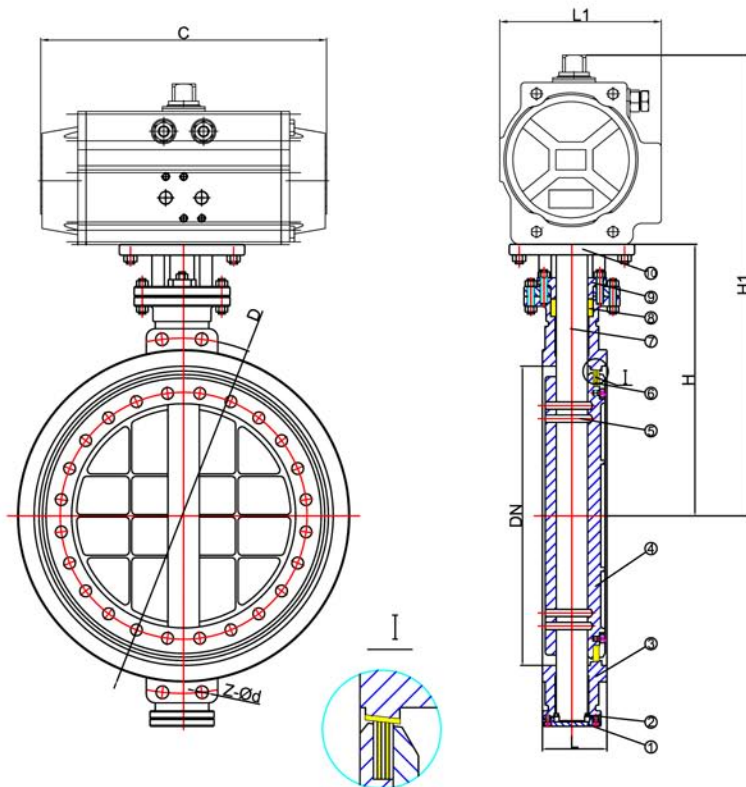

Size		L	H	PN16			PN25			DOUBLE ACTING			
DN	NPS			D	Z	d	D	Z	d	H1	C	L1	WT kg
50	2"	43	160	125	4	18	125	4	18	277	207	94.5	/
65	2½"	46	175	145	4	18	145	4	18	303.5	237.5	106	/
80	3"	49	190	160	4	18	160	4	18	318.5	237.5	106	/
100	4"	56	195	180	4	18	190	4	22	336.5	271.5	123	/
125	5"	64	215	210	4	18	220	4	26	386.5	328	137	/
150	6"	70	225	240	4	22	250	4	26	408.5	366	148	/
200	8"	71	298	295	4	22	310	4	26	504	428	164	/
250	10"	76	328	355	4	26	370	4	30	550	430	286.5	/
300	12"	83	365	410	4	26	430	4	30	617	482	204	/
350	14"	92	408	470	4	26	490	4	33	682	532	224	/

APPLICABLE STANDARDS & TECHNICAL NOTES:

DESIGN CODM		GB/T 12236		
INSPECTION&TEST		GB/T 13927		
END STANDARD		HG 20592		
FACE TO FACE		GB/T 12221		
10	STENTS	DI/WCB/CF8/CF8M	1	
9	PACKING GLAND	DI/WCB/CF8/CF8M	1	
8	PACKING	FLEXIBLE GRAPHITE	6	
7	STEM	304	1	
6	SEAL	304+FLEXIBLE GRAPHITE	1	
5	PIN	304	1	
4	DISC	DI/WCB/CF8/CF8M	1	
3	SCREW	304	1	
2	PRESSURE RING	304	1	
1	BODY	DI/WCB/CF8/CF8M	1	
NO.	PARTS NAME	MATERIAL	QTY	NOTE

TEST PRESSURE

	SHELL	SEAL
HYDROSTATIC	24/37.5 kg/cm ²	17.6/27.5 kg/cm ²
AIR	/	/

TITLE:TRIPLE ECCENTRIC BUTTERFLY VALVE TO THE CLAMP
DN50-DN350

				DWG NO:FT0114000001-2	
1	2006.2.1	ZhuHui	Brian	Sky Tang	
REV	Date	DRN	CHK	APRV	
				SCALE	UNIT mm