
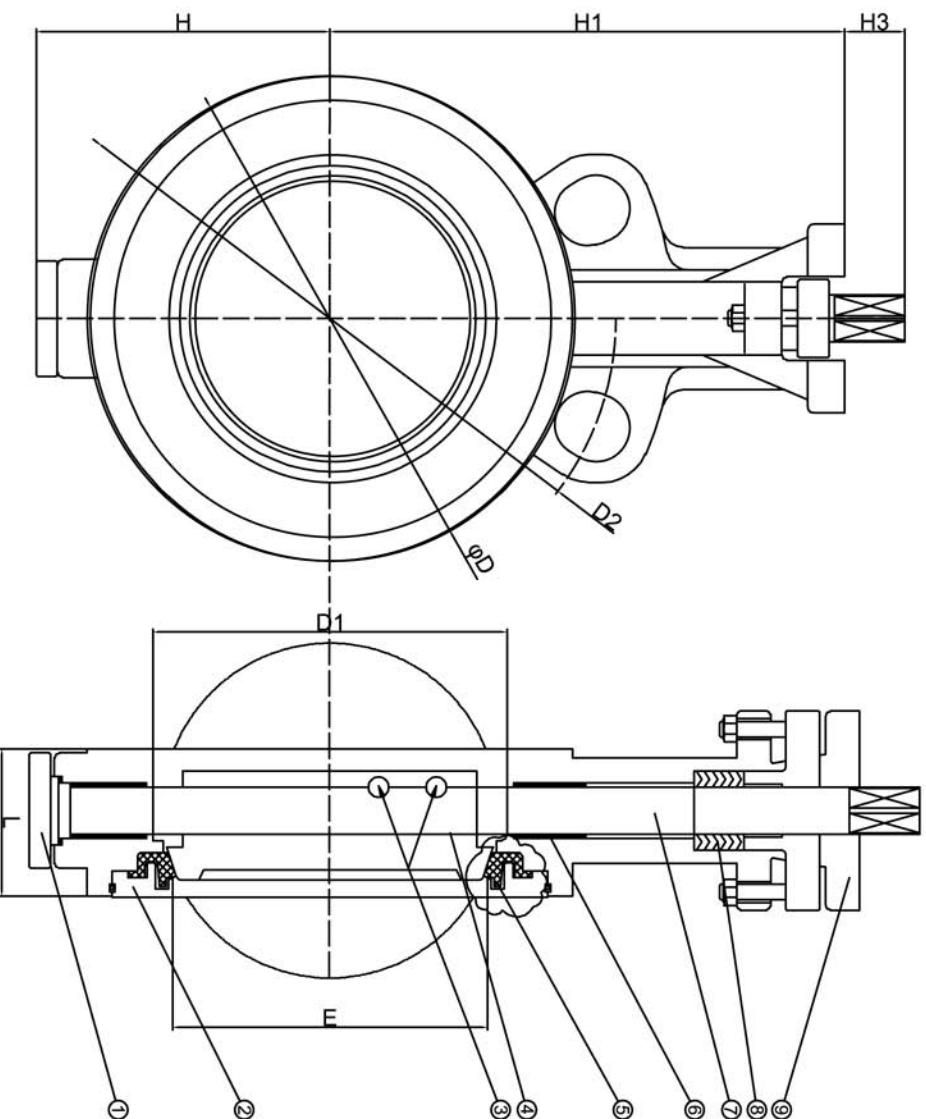




Size	DN	NPS	H1	H2	H3	L	D	D1	E	P	Q	D2		
												10K	PN16	150LB
50	2"	65	138	16	43	96	48	40	11	F07	120	125	120.5	
65	2½"	75	148	16	43	119	64	60	11	F07	140	145	139.5	
80	3"	80	168	18	46	132	82	76	11	F07	150	160	152.5	
100	4"	92	180	18	54	156	102	95	11	F07	175	180	190.5	
125	5"	115	202	21	56	186	122	115	14	F07	210	210	216	
150	6"	126	225	21	56	216	148	142	14	F10	240	240	241.5	
200	8"	165	265	25	64	264	197	189	22	F10	290	295	298.5	
250	10"	235	315	28	71	320	243	238	22	F12	355	355	362	
300	12"	258	342	32	78	381	295	282	27	F12	432	410	400	
350	14"	295	375	38	92	413	325	318	27	F14	455	470	476	

APPLICABLE STANDARDS & TECHNICAL NOTES:

DESIGN CODM	API609
INSPECTION&TEST	API598
END STANDARD	ANSI 150#/JIS10K
FACE TO FACE	API609

9	BADY	WCB/CF8/CF8M	4	
8	STEM SEAL	PTFE	1	
7	STEM	17-4PH/410S	1	
6	BEARING ASSEMBLY	304+PTFE	1	
5	SEAT	RPTE	4	
4	DISC	SS304/316	1	
3	TAPER PINS	SS304	1	
2	SEAT RETAINER PLATE	WCB/CF8/CF8M	1	
1	LOCATING PLUG	WCB/CF8/CF8M	1	
NO.	PARTS NAME	MATERIAL	QTY	NOTE

TEST PRESSURE	
HYDROSTATIC	24/15 kg/cm²
AIR	17.6/11 kg/cm²
TITLE:HIGH PERFORMANCE BUTTERFLY VALVE	
DN50-DN450	

REV	Date	DRN	CHK	APRV	SCALE	UNIT
1	2006.2.1	ZhuHui	Brian	Sky Tang		mm
DWG NO:FT0114000002-1						