


Size	A	B	C	D	E	F	L	H	L1	WT (kg)
DN 150										
80 2"	48.8	60	60.3	67	16	11	90	145	220	
65 2 1/2"	68.8	81	88.1	73	16	11	97	151.5	220	
80 3"	79.1	78	88.9	97	16	11	97	167.5	220	
100 4"	99	101	114.3	122.5	16	11	116	179	260	
125 5"	123.5	127	137	141.3	16	11	134	198.5	260	
150 6"	149.5	150	165	175	16	11	134	211	260	
200 8"	198.5	202	219	232	20.5	11	148			
250 10"	248.5	253	278	286	20.5	11	160			
300 12"	298.5	303	323	336.5	20.5	11	168			

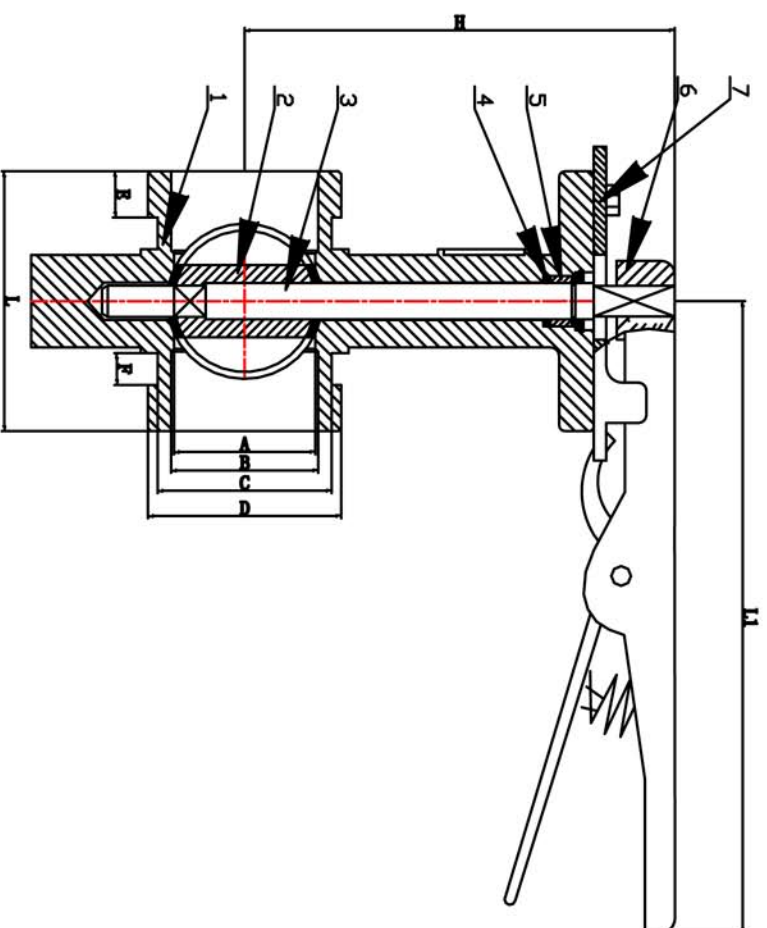

APPLICABLE STANDARDS & TECHNICAL NOTES:

DESIGN CODE: API609

INSPECTION TEST: API608

END STANDARD: ANSI 160M/JIS10K

FACE TO FACE: API609

9 GEAR: CAST IRON

8 HANDWHEEL: CI

7 INDICATOR: CARBON STEEL

6 LEVER: MALLEABLE IRON

5 X-RING: EPDM

4 BUSHING: PTFE

3 SHAFT: S3410

2 DISC: WCB/DH+NYLON/CF8/CF8M

1 BODY: DWCB/CF8/CF8M

NO. PARTS NAME: MATERIAL

TEST PRESSURE: QTY NOTE

SHIELD: SEAL

HYDROSTATIC: 2415 kg/cm² 17.8/11 kg/cm²

AIR: /

TITLE: PNEUMATIC FLANGE BUTTERFLY VALVE

DN60-DN460

DWG NO: FTO14000002-1

REV 1 2008.2.1 Zhihui Brian Sky Tung

CHK CHK APRV SCALE

UNIT mm

