




Size	DN NPS	d	L	H	OP	K	J	SPRING RETURN			DOUBLE ACTING			THREAD
								H1	L1	WT (kg)	H1	L1	WT (kg)	
15	1/2"	15	75	56	11	42	50	173	207	/	156.5	162	/	NPT
20	3/4"	20	80	59	11	42	50	175	207	/	159.5	162	/	BSP
25	1"	25	92	61	11	42	50	189.5	237.5	/	178	207	/	PT
32	1 1/4"	32	110	75	14	50	70	203.5	237.5	/	192	207	/	DIN
40	1 1/2"	38	124	78	14	50	70	219.5	271.5	/	206.5	237.5	/	
50	2"	50	150	104	17	70	102	245.5	271.5	/	232.5	237.5	/	
65	2 1/2"	64	185	112	17	70	102	283.5	328	/	254.5	271.5	/	etc

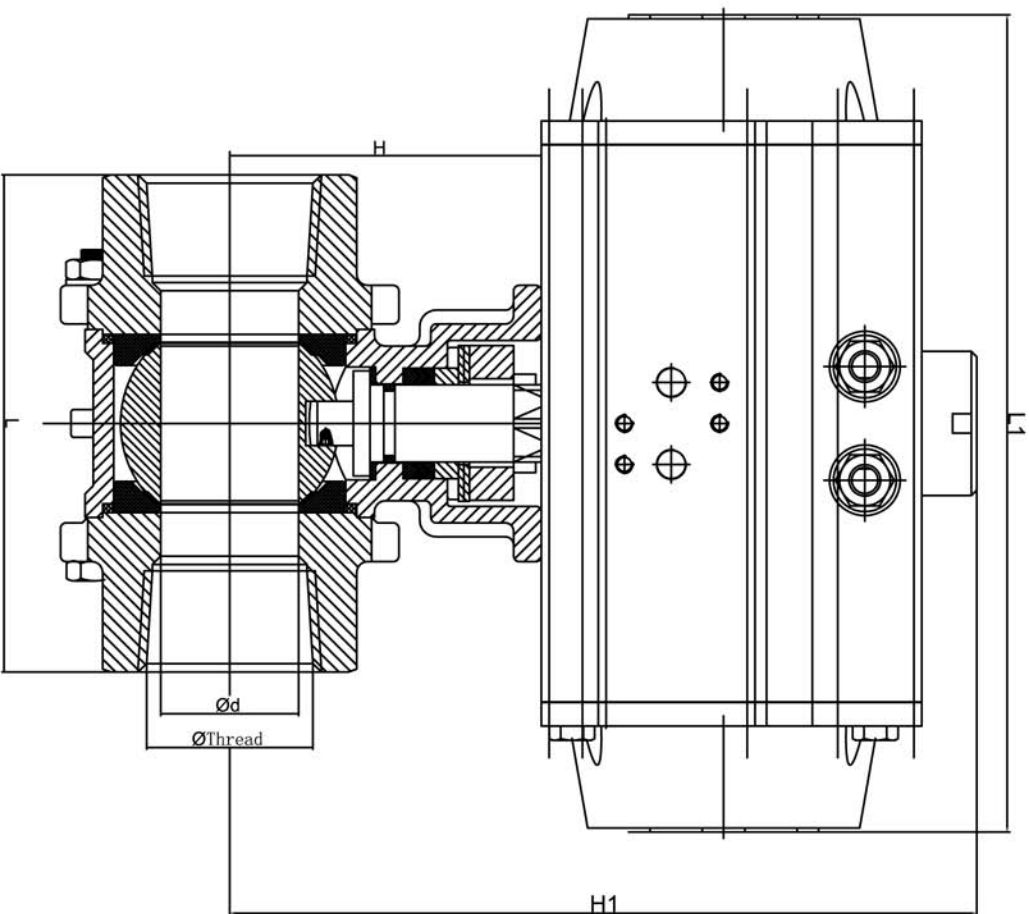

APPLICABLE STANDARDS & TECHNICAL NOTES:													
DESIGN CODM				MSS SP-110									
INSPECTION&TEST				MSS SP-110									
PIPE THREAD				ASME B1.20.1,DIN2999/259,ISO 228/1									
THICKNESS				EN 12516-3									
18	NUT		A194 8									2	
17	BOLTS		A193 B8									2	
16	PACKING GLAND		SS									1	
15	DISC SPRING		SS									2	
14	PACKING RING		SS									1	
13	PACKING		TFM1600									3	
12	O-RINGS		VITON									1	
11	THRUST WASHERS		RITE									1	
10	STEM		316									1	
9	ANTISTATIC DEVICE		SS									1	
8	NUT		A194 8									4	
7	SPRING WASHERS		SS									1	
6	SEAT		TFM1600									1	
5	BALL		SS304/SS316									1	
4	BODY		CF8/CF8M									1	
3	BODY GASKET		TFM1600									1	
2	BONNET		CF8/CF8M									1	
1	BOLTS		A193 B8									4	
NO.	PARTS NAME		MATERIAL									QTY	NOTE
TEST PRESSURE													
			SHELL									SEAL	
HYDROSTATIC			150	kg/cm ²								110	kg/cm ²
AIR			/										
TITLE:THREAD BALL VALVE													
DN15-DN65													
DWG NO:FT0114000003-1.1													
1	2006.2.1	ZhuHui	Brian	Sky Tang									
REV	Date	DRN	CHK	APRV	SCALE								
UNIT mm													

FM