

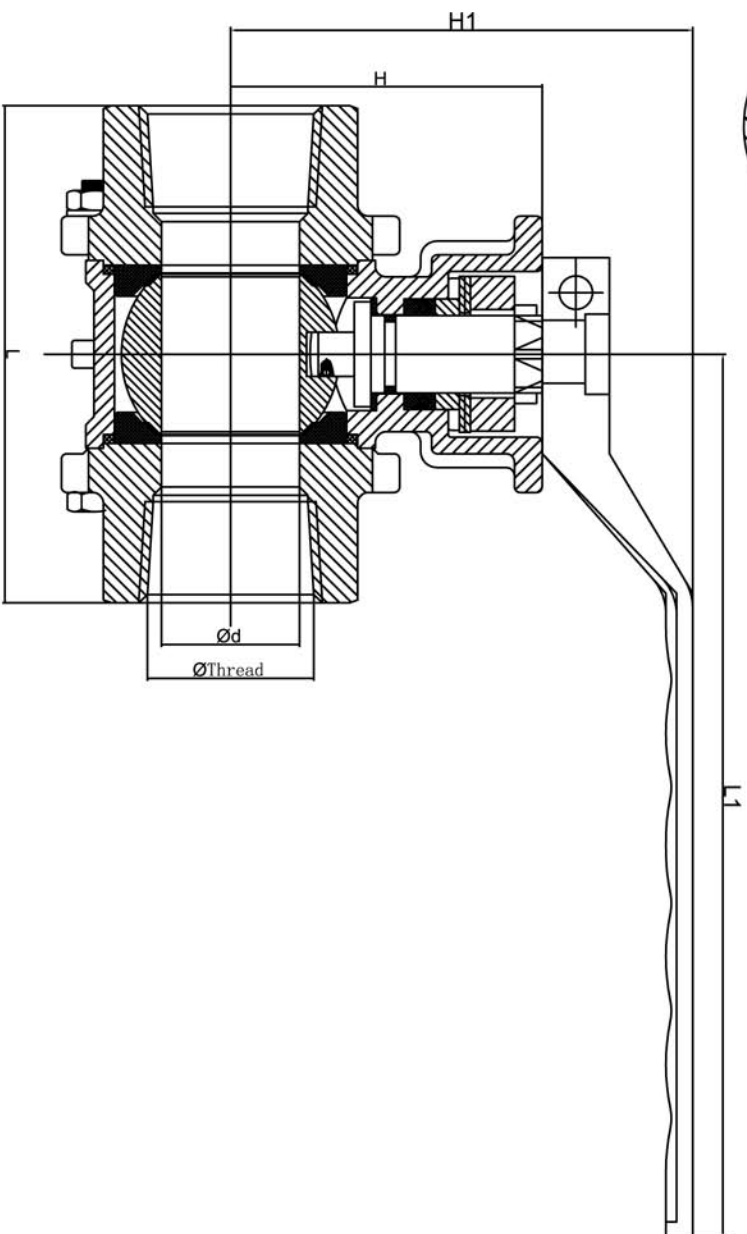


Size		d	L	H	OP	K	J	L1	H1	WT	THREAD
DN	NPS									(kg)	
15	½"	15	75	56	11	42	50	196	86	/	NPT
20	¾"	20	80	59	11	42	50	196	89	/	BSP
25	1"	25	92	61	11	42	50	196	91	/	PT
32	1¼"	32	110	75	14	50	70	232	112.5	/	DIN
40	1½"	38	124	78	14	50	70	232	115.5	/	etc
50	2"	50	150	104	17	70	102	300	174	/	
65	2½"	64	185	112	17	70	102	300	184	/	



APPLICABLE STANDARDS & TECHNICAL NOTES:											
DESIGN CODM			MSS SP-110								
INSPECTION&TEST			MSS SP-110								
PIPE THREAD			ASME B1.20.1,DIN2999/259,ISO 228/1								
THICKNESS			EN 12516-3								
18	NUT		A194 8		2						
17	BOLTS		A193 B8		2						
16	PACKING GLAND		SS		1						
15	DISC SPRING		SS		2						
14	PACKING RING		SS		1						
13	PACKING		TFM1600		3						
12	O-RINGS		VITON		1						
11	THRUST WASHERS		RTFE		1						
10	STEM		316		1						
9	ANTISTATIC DEVICE		SS		1						
8	NUT		A194 8		4						
7	SPRING WASHERS		SS		1						
6	SEAT		TFM1600		1						
5	BALL		SS304/SS316		1						
4	BODY		CF8/CF8M		1						
3	BODY GASKET		TFM1600		1						
2	BONNET		CF8/CF8M		1						
1	BOLTS		A193 B8		4						
NO.	PARTS NAME		MATERIAL		QTY						NOTE
TEST PRESSURE											
			SHELL		SEAL						
HYDROSTATIC			150 kg/cm ²		110 kg/cm ²						
AIR			/		/						
TITLE:THREAD BALL VALVE											
DN15-DN65											
			DWG NO:FT0114000003-1.1								
1	2006.2.1	ZhuHui	Brian	Sky Tang							
REV	Date	DRN	CHK	APRV	SCALE			UNIT	mm		

