


Size	DN	NPS	D	D1	D2	Z	d	T	f	L	H	DA			SR
												L1	H1	L1	H1
25	1"	110	79.4	50.8	4	15.9	16	2	102	133	207	250	237.5	261.5	
32	1 1/4"	115	88.9	63.5	4	15.9	18	2	102	138	207	255	237.5	264.5	
40	1 1/2"	125	98.4	73	4	15.9	18	2	114	140	237.5	268.5	271.5	281.5	
50	2"	150	120.7	92.1	4	19.1	19	2	124	150	271.5	291.5	320	321.5	
65	2 1/2"	180	139.7	104.8	4	19.1	20	2	145	165	320	336.5	366	348.5	
80	3"	190	152.4	127	4	19.1	20	2	165	178	320	349.5	366	361.5	
100	4"	230	190.5	157.2	8	19.1	22	2	194	190	366	373.5	428	396	
125	5"	255	215.9	185.7	8	22.2	22	2	194	205	428	411	430	427	
150	6"	280	241.3	215.9	8	22.2	24	2	229	235	430	457	532	509	
200	8"	345	298.5	269.9	8	22.2	26	2	243	265	532	539	662	583	

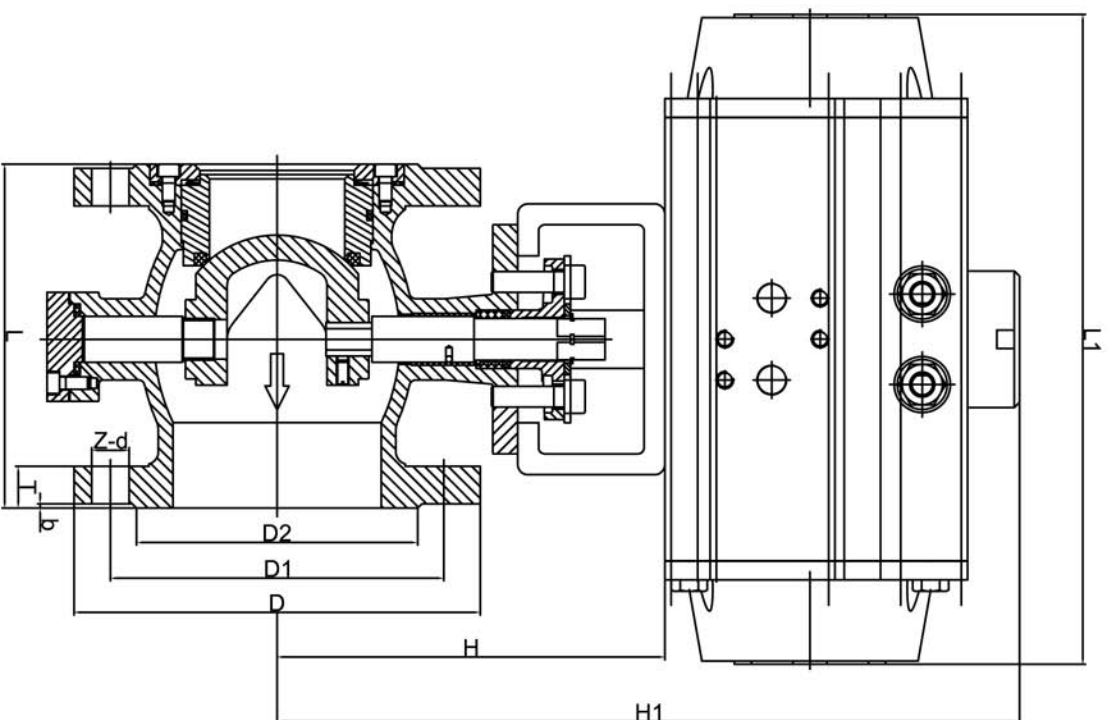

APPLICABLE STANDARDS & TECHNICAL NOTES:

DESIGN CODM	GB/T 12273
INSPECTION&TEST	API 598
END STANDARD	ASME B16.5
FACE TO FACE	EN 558-12

8	PACKING RING	WCB/CF8/CF8M	1	
7	PACKING	PTFE	1	
6	STEM	304/316	1	
5	BALL	CF8+STL/CF8M+STL	1	
4	SEAT	304+STL/316+STL	1	
3	SEAL	FPM	2	
2	BODY	WCB/CF8/CF8M	1	
1	GLAND	WCB/CF8/CF8M	1	

NO.	PARTS NAME	MATERIAL	QTY	NOTE
TEST PRESSURE				
	SHELL			
HYDROSTATIC	30 kg/cm ²		22 kg/cm ²	
AIR	/		/	

TITLE: V-SHAPED BALL VALVE

DN25-DN200

DWG NO: FT0114000003-1.1

REV	Date	DRN	CHK	APRV	SCALE	UNIT	mm
1	2006.2.1	ZhuHui	Brian	Sky Tang			

