


Size	DN	NPS	D	D1	D2	Z	d	T	f	L	H	DA			SR
												L1	H1	L1	H1
25	1"	115	85	68	4	14	16	2	102	133	207	250	237.5	261.5	
32	1 1/4"	140	100	78	4	18	18	2	102	138	207	255	237.5	264.5	
40	1 1/2"	150	110	88	4	18	18	2	114	140	237.5	268.5	271.5	281.5	
50	2"	165	125	102	4	18	19	2	124	150	271.5	291.5	320	321.5	
65	2 1/2"	185	145	122	8	18	20	2	145	165	320	336.5	366	348.5	
80	3"	200	160	138	8	18	20	2	165	178	320	349.5	366	361.5	
100	4"	220	180	158	8	18	22	2	194	190	366	373.5	428	396	
125	5"	250	210	188	8	18	22	2	194	205	428	411	430	427	
150	6"	285	240	212	8	22	24	2	229	235	430	457	532	509	
200	8"	340	295	268	12	22	26	2	243	265	532	539	662	583	

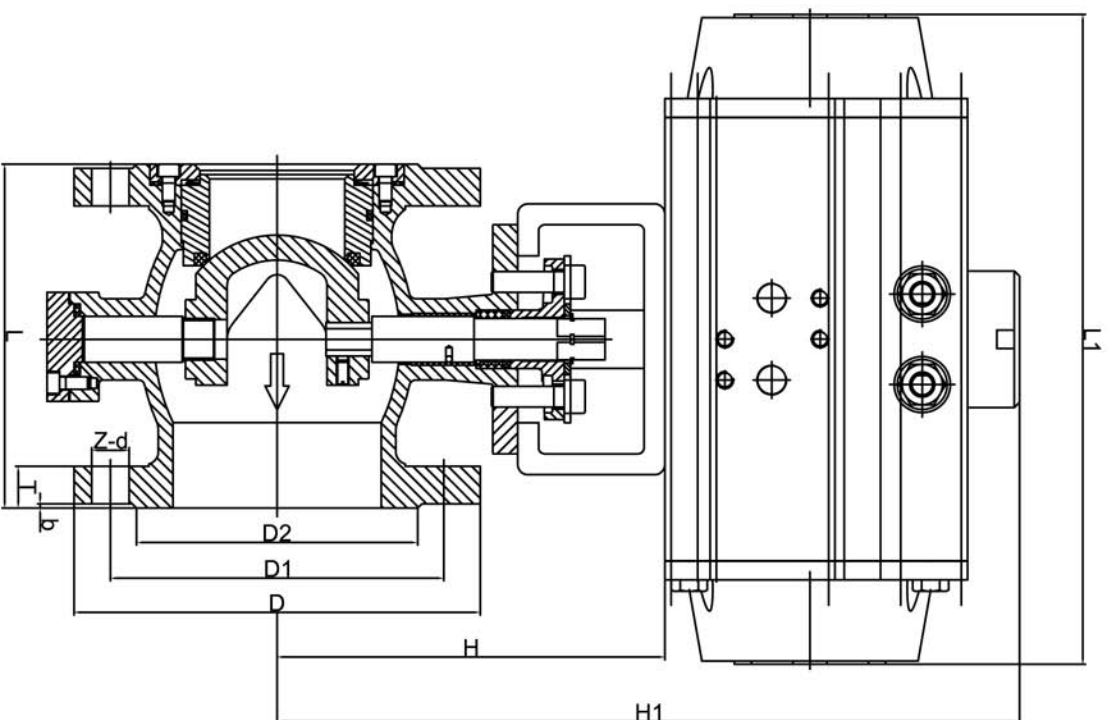

APPLICABLE STANDARDS & TECHNICAL NOTES:

DESIGN CODM	GB/T 12273
INSPECTION&TEST	GB/T 13927
END STANDARD	HG/T 20592
FACE TO FACE	GB/T 12221

8	PACKING RING	WCB/CF8/CF8M	1	
7	PACKING	PTFE	1	
6	STEM	304/316	1	
5	BALL	CF8+STL/CF8M+STL	1	
4	SEAT	304+STL/316+STL	1	
3	SEAL	FFPM	2	
2	BODY	WCB/CF8/CF8M	1	
1	GLAND	WCB/CF8/CF8M	1	

NO.	PARTS NAME	MATERIAL	QTY	NOTE
TEST PRESSURE				
	SHELL			
	HYDROSTATIC	24 kg/cm ²		17.6 kg/cm ²
	AIR	/		/

TITLE:V-SHAPED BALL VALVE

DN25-DN200

DWG NO:FT0114000003-1.1

REV	Date	DRN	CHK	APRV	SCALE	UNIT
1	2006.2.1	ZhuHui	Brian	Sky Tang		mm

