
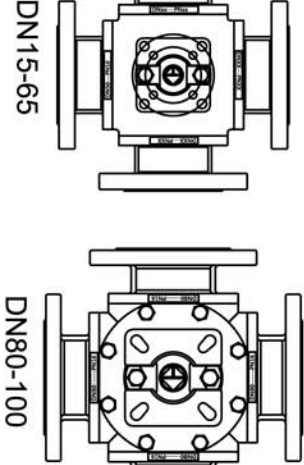


T-Cock

- Technique norm
- 1. Top Flange: ISO 5211
 - 2. Wall Thickness:GB26640-2011
 - 3. Checkout Test:GB/T13927

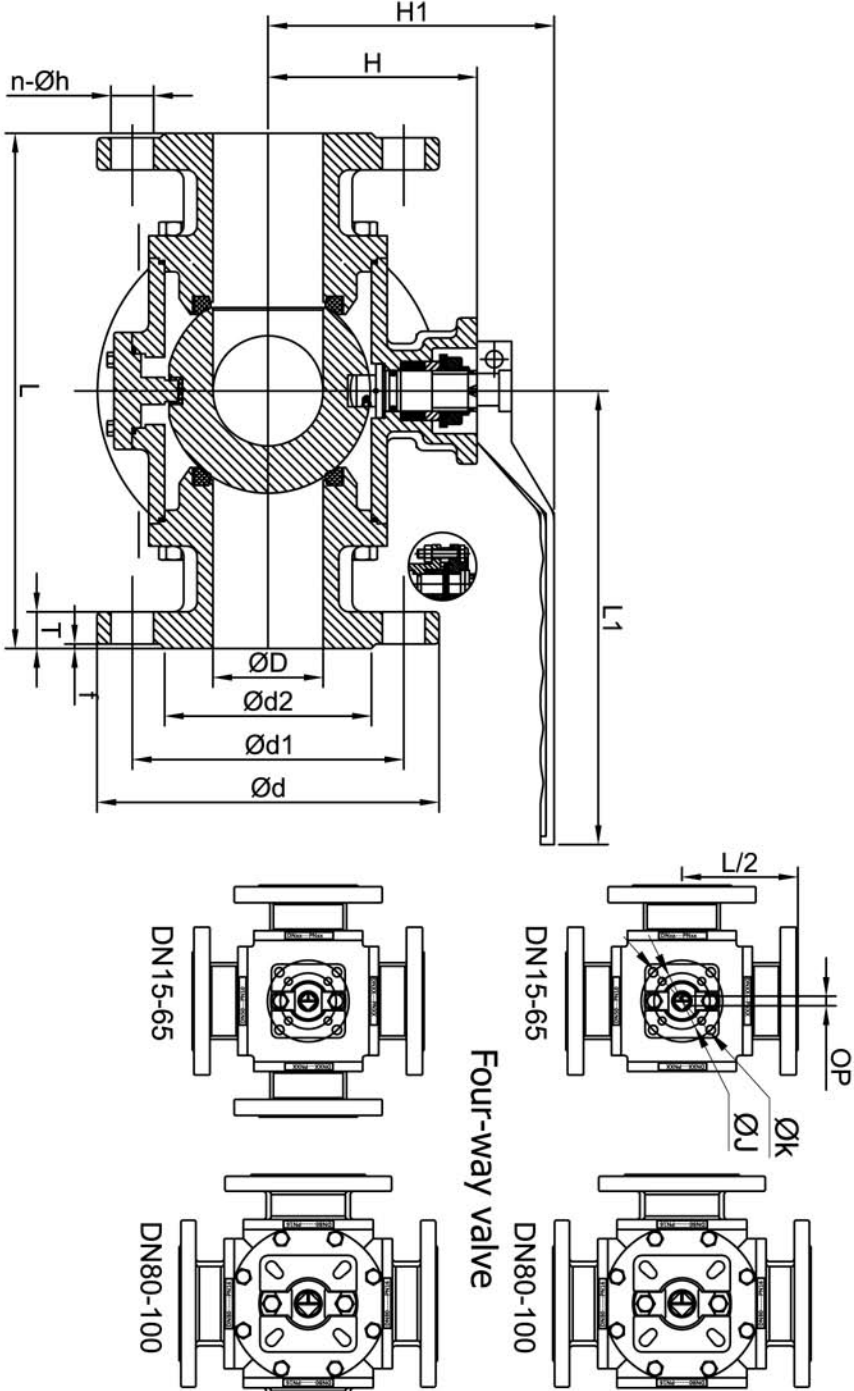

Four-way valve

17	Nut	A194 2H	A194 8	A194 8
16	Bolt	A193 B7	A193 B8	A193 B8
15	Packing Gland	WCB	SS	SS
14	Disc Spring	SS	SS	SS
13	Packing Ring	SS	SS	SS
12	Packing	TFM1600	TFM1600	TFM1600
11	O-Ring	VITON	VITON	VITON
10	Thrust Washer	RTFE	RTFE	RTFE
9	Stem	316	316	316
8	ESD	SS	SS	SS
7	Seat	TFM1600	TFM1600	TFM1600
6	wear-proof casing	PTFE	PTFE	PTFE
5	Fixed seat	SS304	SS304	SS316
4	Ball	SS304	SS304	SS316
3	Body	WCB	CF8	CF8M
2	Seat	TFM1600	TFM1600	TFM1600
1	Bonnet	WCB	CF8	CF8M

Material			
NO.	Name		

总装图

手动三、四通法兰球阀

Q61F-PN16-DN15-100

设计	更改文件号	签字	日期
校对	标准	审核	批准
审核	日期	日期	日期
工艺	日期	日期	日期

共	页	第	页
---	---	---	---