


T-Cock

Technique norm

1. Top Flange: ISO 5211
2. Wall Thickness: GB26640-2011
3. Checkout Test: GB/T13927

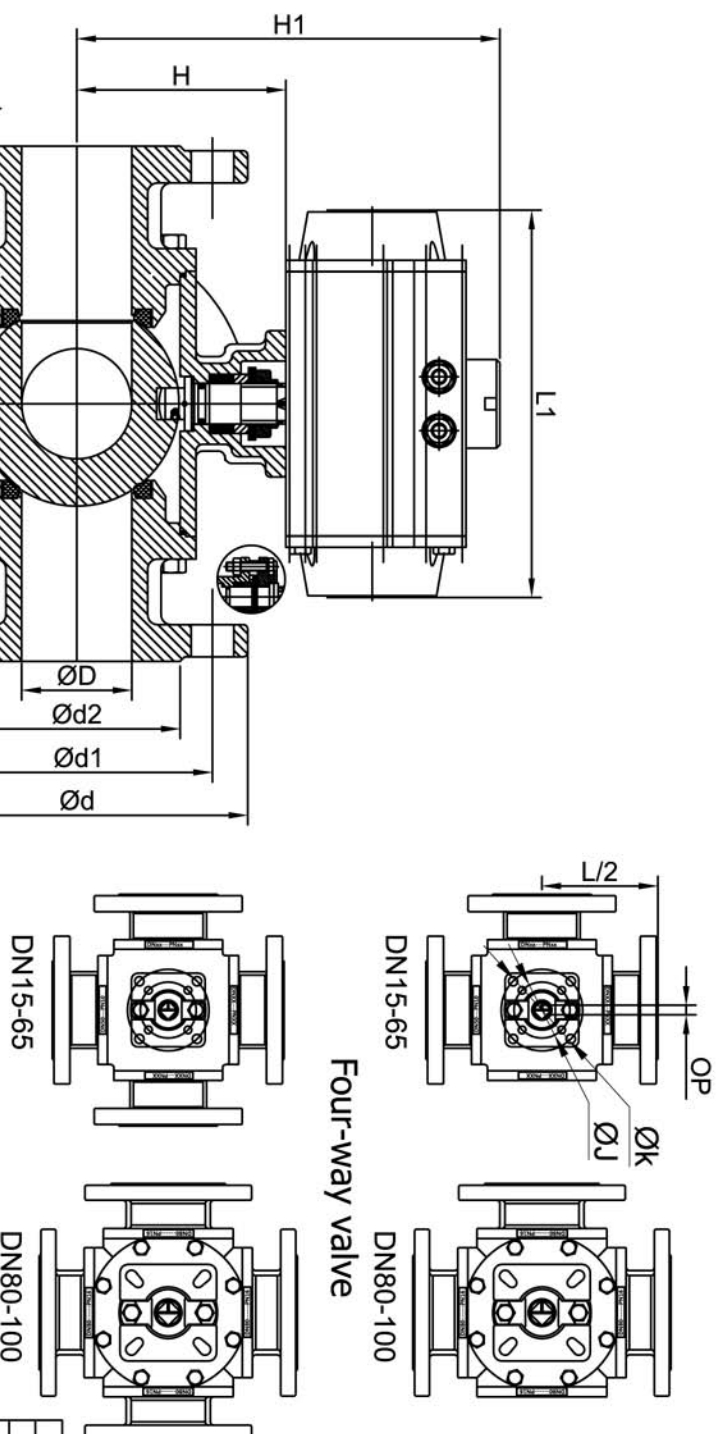

17	Nut	A194 2H	A194 8	A194 8
16	Bolt	A193 B7	A193 B8	A193 B8
15	Packing Gland	WCB	SS	SS
14	Disc Spring	SS	SS	SS
13	Packing Ring	SS	SS	SS
12	Packing	TFM1600	TFM1600	TFM1600
11	o-Ring	VITON	VITON	VITON
10	Thrust Washer	RTFE	RTFE	RTFE
9	Stem	316	316	316
8	ESD	SS	SS	SS
7	Seat	TFM1600	TFM1600	TFM1600
6	wear-proof casing	PTFE	PTFE	PTFE
5	Fixed seat	SS304	SS304	SS316
4	Ball	SS304	SS304	SS316
3	Body	WCB	CF8	CF8M
2	Seat	TFM1600	TFM1600	TFM1600
1	Bonnet	WCB	CF8	CF8M
NO.	Name	Material		

总装图



气动三、四通法兰球阀

总装图									
气动三、四通法兰球阀									
Q61F-PN16-DN15-100									

抽 校		气 动 器 具																	
DN	PN	φD	φd	φd1	φd2	L	n	φh	T	f	H	□P	J	K	双作用	H1	L1	H1	L1
15	10-40	15	95	65	45	155	4	14	16	2	64.5	11	42	50	63	165	162	75	181.5
20	10-40	20	105	75	58	165	4	14	18	2	64.5	11	42	50	75	181.5	207	85	193
25	10-40	25	115	85	68	181	4	14	18	2	67.5	11	42	50	75	184.5	207	85	196
32	10-40	32	140	100	78	190	4	18	18	2	78.5	14	50	70	75	195.5	207	85	207
40	10-40	40	150	110	88	212	4	18	18	3	85	14	50	70	85	213.5	237.5	100	226.5
50	10-40	50	165	125	102	232	4	18	20	3	93	14	50	70	100	234.5	271.5	115	264.5
65	10-40	65	185	145	122	290	4	18	22	3	121	17	70	102	115	292.5	328	125	304.5
80	10-16	76	200	160	138	310	8	18	20	3	153	22	102	125	125	336.5	366	140	359
100	10-16	100	220	180	158	352	8	18	22	3	170.5	22	102	125	140	376.5	428	160	392.5

总装图									
气动三、四通法兰球阀									
Q61F-PN16-DN15-100									

Q61F-PN16-DN15-100