


Size		CLASS150		JIS 10K		PN10		PN16		A	B	ΦD	L	H	C	WT (kg)
DN	NPS	D1	N-Φd1	D1	N-Φd1	D1	N-Φd1	D1	N-Φd1							
50	2"	120.6	4-Φ19.1	120	4-Φ19	125	4-Φ19	125	4-Φ19	161	83	52.9	42	292	99	/
65	2½"	139.7	4-Φ19.1	140	4-Φ19	145	4-Φ19	145	4-Φ19	175	93	64.5	45	316	99	/
80	3"	152.4	4-Φ19.1	150	8-Φ19	160	8-Φ19	160	8-Φ19	181	95	78.8	46	324	99	/
100	4"	190.5	8-Φ19.1	175	8-Φ19	180	8-Φ19	180	8-Φ19	200	114	104	52	362	99	/
125	5"	215.9	8-Φ22.4	210	8-Φ23	210	8-Φ19	210	8-Φ19	213	127	123.3	55	394	115	/
150	6"	241.3	8-Φ22.4	240	8-Φ23	240	8-Φ23	240	8-Φ23	226	139	155.1	56	419	115	/
200	8"	298.5	8-Φ22.4	290	12-Φ23	295	8-Φ23	295	12-Φ23	260	175	202.5	61	506	220	/
250	10"	361.9	12-Φ22.4	355	12-Φ25	350	12-Φ23	355	12-Φ28	292	203	250.5	66	566	220	/
300	12"	431.8	12-Φ22.4	400	16-Φ25	400	12-Φ23	410	12-Φ28	337	242	301.5	77	650	220	/
350	14"	476	12-Φ28.5	445	16-Φ25	460	16-Φ23	470	16-Φ28	368	267	333.3	77	715	323	/

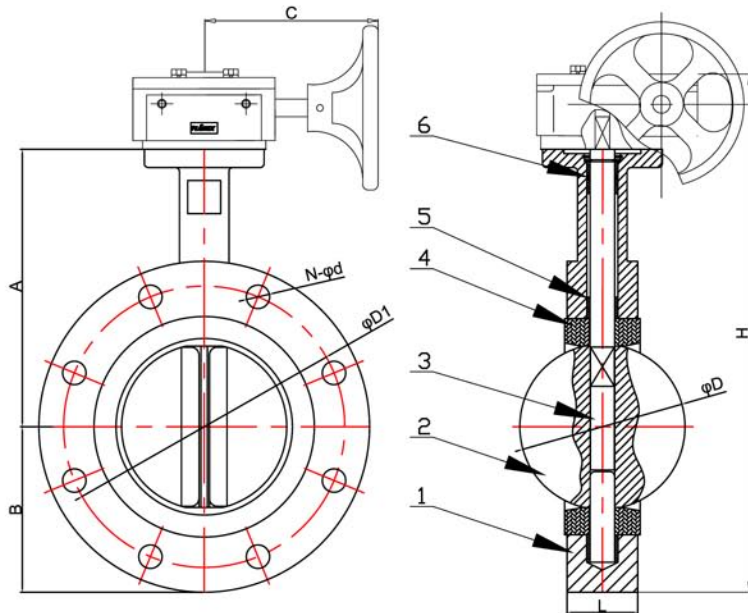

APPLICABLE STANDARDS & TECHNICAL NOTES:

DESIGN CODM		API609		
INSPECTION&TEST		API598		
END STANDARD		ANSI 150#/JIS10K		
FACE TO FACE		API609		
6	O-RING	NBR	1	
5	BUSHING	PTFE	4	
4	SEAT	EPDM/NBR/PTFE/VITON	1	
3	SHAFT	410	1	
2	DISC	WCB/DI+NYLON/CF8/CF8M	1	
1	BODY	DI/WCB/CF8/CF8M	1	
NO.	PARTS NAME	MATERIAL	QTY	NOTE

DI/WCB/CF8/CF8M

SHELL		SEAL	
HYDROSTATIC		24/15 kg/cm ²	
AIR		17.6/11 kg/cm ²	

TITLE:U TYPE BUTTERFLY VALVE
DN50-DN350

					DWG NO: FT0114000003-1.1			
								
1	2006.2.1	ZhuHui	Brian	Sky Tang				
REV	Date	DRN	CHK	APRV	SCALE		UNIT	mm